
1 PANEL SHAKER MOLDED DOORS



SMOOTH

8'0" SQUARE





HOLLOW CORE DOOR

- 1-3/8" and 1-3/4" hollow core
- Fiberwood or Fingerjoint stiles and rails

SOLID CORE DOOR

- 1-3/8" and 1-3/4" solid core
- Gives solid feel with sound reduction
- Fingerjoint stiles and rails

Sizes Available						
Dimensions	Availability	Panels				
1'0" x 8'0"	NA	NA				
1'2" x 8'0"	NA	NA				
1'3" x 8'0"	NA	NA				
1'4" x 8'0"	Х	1				
1'6" x 8'0"	Х	1				
1'8" x 8'0"	Х	1				
1'10" x 8'0"	$\sqrt{}$	1				
2'0" x 8'0"	$\sqrt{}$	1				
2'2" x 8'0"	Х	1				
2'4" x 8'0"	$\sqrt{}$	1				
2'6" x 8'0"	$\sqrt{}$	1				
2'8" x 8'0"	$\sqrt{}$	1				
2'10" x8'0"	X	1				
3'0" x 8'0"	V	1				

NOTE: Items designated with an X are cut from larger size skins. Items designated with a √ are available for order. NA for Not Available.






1 PANEL SHAKER MOLDED DOORS

SMOOTH 8'0" SQUARE




SOLID CORE CONSTRUCTION

Standard Dimensions

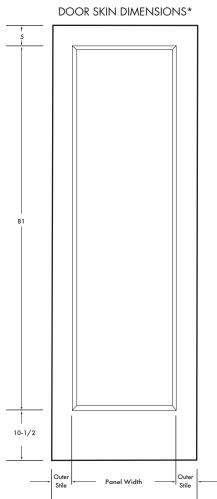



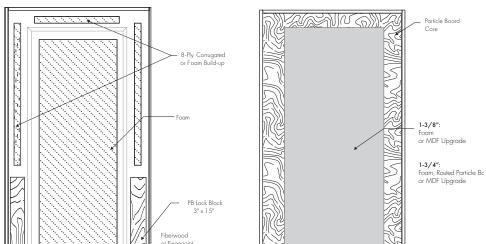

Smooth skin faces are paint grade only. All measurements are approximate. All door facings are nominal 1/8" thick. Type 2 glue bond standard.

1-1/8" x 1-1/8"

	Outer Stile	-	Panel Width Skin Overall	_	Outer Stile	-			Smoo All me
*Measurements are approximate and before any required trim or adjustments for customer specifications						All do Type			
			-		_		_	_	

Skin Size	Skin Overall	Panel Width	Center Stile	Outer Stile
1'0" x 8'0"	NA	NA	NA	NA
1'2" x 8'0"	NA	NA	NA	NA
1'3" x 8'0"	NA	NA	NA	NA
1'4" x 8'0"	1'4-3/8"	7-7/8"	NA	4-1/4"
1'6" x 8'0"	1'6-3/8"	7-7/8"	NA	5-1/4"
1'8" x 8'0"	1'8-3/8"	11-1/2"	NA	4-7/16"
1'10" x 8'0"	1'10-3/8"	11-1/2"	NA	5-7/16"

Skin Size	Overall	Width	Stile	Stile
2'0" x 8'0"	2'0-3/8"	1'3-1/2"	NA	4-7/16"
2'2" x 8'0"	2'2-3/8"	1'3-1/2"	NA	5-7/16"
2'4" x 8'0"	2'4-3/8"	1'6-1/2"	NA	4-15/16"
2'6" x 8'0"	2'6-3/8"	1'8-1/2"	NA	4-15/16"
2'8" x 8'0"	2'8-3/8"	1'10-1/2"	NA	4-15/16"
2'10" x 8'0"	2'10-3/8"	1'10-1/2"	NA	5-15/16"
3'0" x 8'0"	3'0-3/8"	2'2-1/2"	NA	4-15/16"

Note: A standard 2-1/8" bore diameter will require a minimum stile measurement of 3-11/16" to allow for a 2-3/8" backset. A standard 2-1/8" bore diameter will require a minimum stile measurement of 4-1/16" to allow for a 2-3/4" backset.