
# **2 PANEL SHAKER MOLDED DOORS**



SMOOTH

6'8" SQUARE





### **HOLLOW CORE DOOR**

- 1-3/8" and 1-3/4" hollow core
- Fiberwood or Fingerjoint stiles and rails

### **SOLID CORE DOOR**

- 1-3/8" and 1-3/4" solid core
- Gives solid feel with sound reduction
- Fingerjoint stiles and rails

Sizes Available				
Dimensions	Availability	Panels		
1'0" x 6'8"	V	2		
1'2" x 6'8"	Х	2		
1'3" x 6'8"	√	2		
1'4" x 6'8"	Х	2		
1'6" x 6'8"	√	2		
1'8" x 6'8"	Х	2		
1'10" x 6'8"	√	2		
2'0" x 6'8"	Х	2		
2'2" x 6'8"	√	2		
2'4" x 6'8"	√	2		
2'6" x 6'8"	√	2		
2'8" x 6'8"	Х	2		
2'10" x 6'8"	V	2		
3'0" x 6'8"	V	2		

NOTE: Items designated with an X are cut from larger size skins. Items designated with a  $\sqrt{}$  are available for order. NA for Not Available.






### **2 PANEL SHAKER MOLDED DOORS**

SMOOTH 6'8" SQUARE




## Standard Dimensions



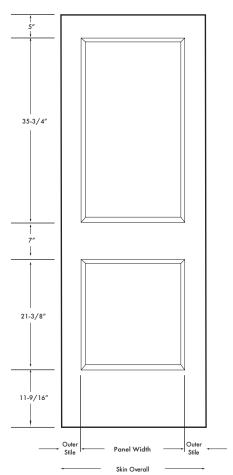

#### HOLLOW CORE CONSTRUCTION

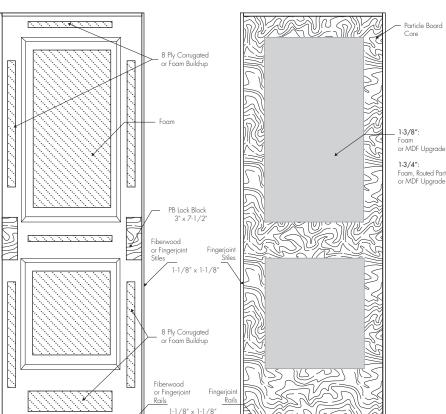

SOLID CORE CONSTRUCTION

1-3/4": Foam, Routed Particle Board or MDF Upgrade

\*Measurements are approximate and before any required trim or adjustments for customer specifications

Skin Outer Panel Center Skin Size Overall Width Stile Stile 1'0" x 6'8" 1'0-3/8" 6" NA 3-3/16" 1'2" x 6'8" 1'2-3/8" 7-1/2" NA 3-7/16" 1'3" x 6'8" 1'3-3/8" 7-1/2" NA 3-15/16" 1'4" x 6'8" 1'4-3/8" 9-1/4" 3-9/16" NA 1'6" x 6'8" 4-9/16" 1'6-3/8" 9-1/4" NA 1'8" x 6'8" 1'8-3/8" 4-7/16" 11-1/2" NA 1'10" x 6'8" 1'10-3/8" 11-1/2" NA 5-7/16"

Smooth skin faces are paint grade only. All measurements are approximate. All door facings are nominal 1/8" thick. Type 2 glue bond standard.

Skin Size	Skin Overall	Panel Width	Center Stile	Outer Stile
2'0" x 6'8"	2'0-3/8"	1'3-1/2"	NA	4-7/16"
2'2" x 6'8"	2'2-3/8"	1'3-1/2"	NA	5-7/16"
2'4" x 6'8"	2'4-3/8"	1'6-1/2"	NA	4-15/16"
2'6" x 6'8"	2'6-3/8"	1'8-1/2"	NA	4-15/16"
2'8" x 6'8"	2'8-3/8"	1'10-1/2"	NA	4-15/16"
2'10" x 6'8"	2'10-3/8"	1'10-1/2"	NA	5-15/16"
3'0" x 6'8"	3'0-3/8"	2'2-1/2"	NA	4-15/16"

Note: A standard 2-1/8" bore diameter will require a minimum stile measurement of 3-11/16" to allow for a 2-3/8" backset. A standard 2-1/8" bore diameter will require a minimum stile measurement of 4-1/16" to allow for a 2-3/4" backset.