
# **2 PANEL SQUARETOP MOLDED DOORS**



SMOOTH

8'0" BEAD AND COVE





Bead and Cove profile

### **HOLLOW CORE DOOR**

- 1-3/8" and 1-3/4" hollow core
- Fingerjoint or Fiberwood stiles
- Wood rails available

### **SOLID CORE DOOR**

- 1-3/8" and 1-3/4" solid core
- Gives solid feel with sound reduction
- All wood construction
- Available in particle board core

| Sizes Available |              |        |  |  |
|-----------------|--------------|--------|--|--|
| Dimensions      | Availability | Panels |  |  |
| 1'0" x 8'0"     | Х            | 2      |  |  |
| 1'2" x 8'0"     | Х            | 2      |  |  |
| 1'3" x 8'0"     | Х            | 2      |  |  |
| 1'4" x 8'0"     | Х            | 2      |  |  |
| 1'6" x 8'0"     | Х            | 2      |  |  |
| 1'8" x 8'0"     | Х            | 2      |  |  |
| 2'0" x 8'0"     | √            | 2      |  |  |
| 2'2" x 8'0"     | Х            | 2      |  |  |
| 2'4" x 8'0"     | √            | 2      |  |  |
| 2'6" x 8'0"     | √            | 2      |  |  |
| 2'8" x 8'0"     | √            | 2      |  |  |
| 2'10" x 8'0"    | Х            | 2      |  |  |
| 3'0" x 8'0"     | √            | 2      |  |  |

NOTE: Items designated with an X are cut from larger size skins.

Items designated with a √ are available for order. NA for Not Available.





## **2 PANEL SQUARETOP MOLDED DOORS**


SMOOTH 8'0" B/C



SOLID CORE CONSTRUCTION

## **Standard Dimensions**

HOLLOW CORE CONSTRUCTION

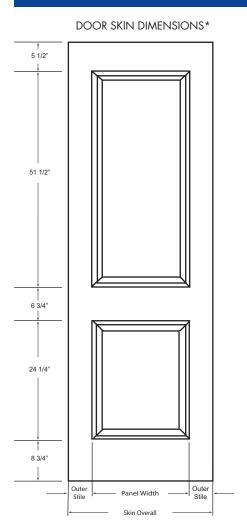

\*Measurements are approximate and before any required trim or adjustments for customer specifications

| Skin Size   | Skin<br>Overall | Panel<br>Width | Center<br>Stile | Outer<br>Stile |
|-------------|-----------------|----------------|-----------------|----------------|
| 1'0" x 8'0" | 1'0-3/8"        | 7"             | NA              | 2-11/16"       |
| 1'2" x 8'0" | 1'2"3/8"        | 7"             | NA              | 3-11/16"       |
| 1'3" x 8'0" | 1'3-3/8"        | 7"             | NA              | 4-3/16"        |
| 1'4" x 8'0" | 1'4-3/8"        | 7"             | NA              | 4-11/16"       |
| 1'6" x 8'0" | 1'6-3/8"        | 11-15/16"      | NA              | 3-7/32"        |
| 1'8" x 8'0" | 1'8-3/8"        | 11-15/16"      | NA              | 4-7/32"        |
| 2'0" x 8'0" | 2'0-3/8"        | 1'3-11/16"     | NA              | 4-11/32"       |

Corrugated Stretch Core

8-Ply Corrugated or Foam Build-up

PB Lock Block
3" x 15"

Smooth skin faces are paint grade only. All measurements are approximate. All door facings are nominal 1/8" thick. Type 2 glue bond standard.

Stiles 1-1/8" x 1-1/8'

| / 1          |                 |                |                 |                |
|--------------|-----------------|----------------|-----------------|----------------|
| Skin Size    | Skin<br>Overall | Panel<br>Width | Center<br>Stile | Outer<br>Stile |
| 2'2" x 8'0"  | 2'2-3/8"        | 1'3-11/16"     | NA              | 5-11/32"       |
| 2'4" x 8'0"  | 2'4-3/8"        | 1'5-11/16"     | NA              | 5-11/32"       |
| 2'6" x 8'0"  | 2'6-3/8"        | 1'7-11/16"     | NA              | 5-11/32"       |
| 2'8" x 8'0"  | 2'8-3/8"        | 1'9-11/16"     | NA              | 5-11/32"       |
| 2'10" x 8'0" | 2'10-3/8"       | 1'11-11/16"    | NA              | 5-11/32"       |
| 3'0" x 8'0"  | 3'0-3/8"        | 1'11-11/16"    | NA              | 6-11/32"       |
|              |                 |                |                 |                |

Note: A standard 2-1/8" bore diameter will require a minimum stile measurement of 3-11/16" to allow for a 2-3/8" backset. A standard 2-1/8" bore diameter will require a minimum stile measurement of 4-1/16" to allow for a 2-3/4" backset.

Routed
Particle Board
Stiles
1-1/8" x 1-1/8"

. Rails 1-1/8" x 1-1/8"