
3 PANEL SHAKER MOLDED DOORS



SMOOTH

6'8" SQUARE





HOLLOW CORE DOOR

- 1-3/8" and 1-3/4" hollow core
- Fiberwood or Fingerjoint stiles and rails

SOLID CORE DOOR

- 1-3/8" and 1-3/4" solid core
- Gives solid feel with sound reduction
- Fingerjoint stiles and rails

Sizes Available				
Dimensions	Availability	Panels		
1'0" x 6'8"	Х	2		
1'2" x 6'8"	Х	2		
1'3" x 6'8"	Х	2		
1'4" x 6'8"	Х	2		
1'6" x 6'8"	Х	2		
1'8" x 6'8"	Х	2		
1'10" x 6'8"	V	2		
2'0" x 6'8"	V	3		
2'2" x 6'8"	Х	3		
2'4" x 6'8"	V	3		
2'6" x 6'8"	V	3		
2'8" x 6'8"	V	3		
2'10" x 6'8"	Х	3		
3'0" x 6'8"	V	3		

NOTE: Items designated with an X are cut from larger size skins.

Items designated with a √ are available for order. NA for Not Available.





3 PANEL SHAKER MOLDED DOORS


SMOOTH 6'8"



SOLID CORE CONSTRUCTION

Standard Dimensions

HOLLOW CORE CONSTRUCTION

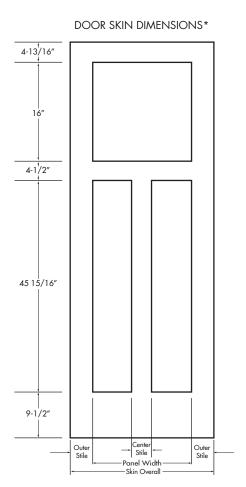

*Measurements are approximate and before any required trim or adjustments for customer specifications

Skin Size	Skin Overall	Panel Width	Center Stile	Outer Stile
1'0" x 6'8"	1'0-3/8"	4"	N/A	4-3/16"
1'2" x 6'8"	1'2-3/8"	6"	N/A	4-3/16"
1'3" x 6'8"	1'3"	6"	N/A	4-1/2"
1'4" x 6'8"	1'4-3/8"	8-1/4"	N/A	4-1/16"
1'6" x 6'8"	1'6-3/8"	10"	N/A	4-3/16"
1'8" x 6'8"	1'8-3/8"	10"	N/A	5-3/16"
1'10" x 6'8"	1'10-3/8"	10"	N/A	6-3/16"

Particle Board
Core

8-Ply Corrugated or Foam Build-up

PB Lock Block
3" x 7-1/2"

1.3/8":
Foam
or MDF Upgrade
1.3/4":
Foam, Routed Particle Board or MDF Upgrade

Smooth skin faces are paint grade only. All measurements are approximate. All door facings are nominal 1/8" thick. Type 2 glue bond standard.

Fiberwood or Fingerjoint

Skin Size	Skin Overall	Panel Width	Center Stile	Outer Stile
2'0" x 6'8"	2'0-3/8"	1'3"	4-1/2"	4-11/16"
2'2" x 6'8"	2'2-3/8"	1'5"	4-1/2"	4-11/16"
2'4" x 6'8"	2'4-3/8"	1'5"	4-1/2"	5-11/16"
2'6" x 6'8"	2'6-3/8"	1'9"	4-1/2"	4-11/16"
2'8" x 6'8"	2'8-3/8"	1'9"	4-1/2"	5-11/16"
2'10" x 6'8"	2'10-3/8"	2'1"	4-1/2"	4-11/16"
3'0" x 6'8"	3'0-3/8"	2'1"	4-1/2"	5-11/16"

Note: A standard 2-1/8" bore diameter will require a minimum stile measurement of 3-11/16" to allow for a 2-3/8" backset. A standard 2-1/8" bore diameter will require a minimum stile measurement of 4-1/16" to allow for a 2-3/4" backset.