5 PANEL SHAKER MOLDED DOORS

SMOOTH 8'0" STEP





HOLLOW CORE DOOR

- 1-3/8" and 1-3/4" hollow core
- Fiberwood or Fingerjoint stiles and rails

SOLID CORE DOOR

- 1-3/8" and 1-3/4" solid core
- Gives solid feel with sound reduction
- Fingerjoint stiles and rails

Sizes Available						
Dimensions	Availability	Panels				
1'0" x 8'0"	NA	NA				
1'3" x 8'0"	NA	NA				
1'6" x 8'0"	\checkmark	6				
1'8" x 8'0"	\checkmark	6				
2'0" × 8'0"	\checkmark	6				
2'2" x 8'0"	Х	6				
2'4" x 8'0"	\checkmark	6				
2'6" x 8'0"		6				
2'8" x 8'0"		6				
2'10" x 8'0"		6				
3'0" x 8'0"		6				

NOTE: Items designated with an X are cut from larger size skins. Items designated with a √ are available for order. NA for Not Available.






Building Quality Doors Since 1866


5 PANEL SHAKER MOLDED DOORS

SMOOTH 8'0" STEP



Standard Dimensions

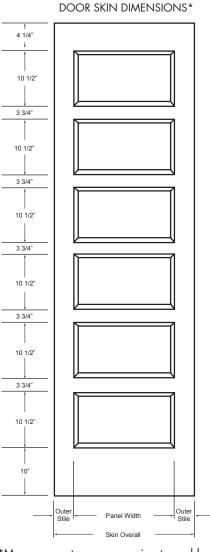

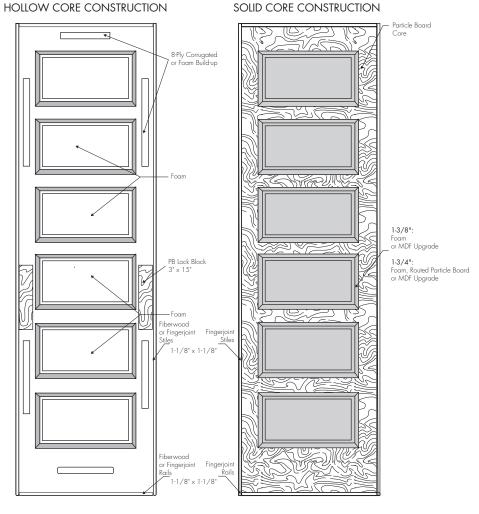

*Measurements are approximate and before any required trim or adjustments for customer specifications

Panel

Width

9-11/16"

9-11/16"

1'3-11/16"

1'3-11/16"

1'7-11/16"

Center

Stile

NA

NA

NA

NA

NA

Skin

Overall

1'6-3/8"

1'8-3/8"

2'0-3/8"

2'2-3/8"

2'4-3/8"

Skin Size

1'6" x 8'0"

1'8" x 8'0"

2'0" x 8'0"

2'2" x 8'0"

2'4" x 8'0"

Smooth skin faces are paint grade only. All measurements are approximate. All door facings are nominal 1/8" thick. Type 2 glue bond standard.

Outer Stile	Skin Size	Skin Overall	Panel Width	Center Stile	Outer Stile
4-11/32"	2'6" x 8'0"	2'6-3/8"	1'9-11/16"	NA	4-11/32"
5-11/32"	2'8" x 8'0"	2'8-3/8"	1'11-11/16"	NA	4-11/32"
4-11/32"	2'10" x 8'0"	2'10-3/8"	1'11-11/16"	NA	5-11/32"
5-11/32"	3'0" x 8'0"	3'0-3/8"	2'1-11/16"	NA	5-11/32"

Note: A standard 2-1/8" bore diameter will require a minimum stile measurement of 3-11/16" to allow for a 2-3/8" backset. A standard 2-1/8" bore diameter will require a minimum stile measurement of 4-1/16" to allow for a 2-3/4" backset.

4-11/32"