
## 6 PANEL MOLDED DOORS

#### SMOOTH 6'8" BEAD AND COVE







Bead and Cove profile

#### HOLLOW CORE DOOR

- 1-3/8" and 1-3/4" hollow core
- Fingerjoint or Fiberwood stiles
- Wood rails available

#### **SOLID CORE DOOR**

- 1-3/8" and 1-3/4" solid core
- Gives solid feel with sound reduction
- All wood construction
- Available in particle board core

Sizes Available								
Dimensions	Availability	Panels						
1'0" x 6'8"	Х	3						
1'2" x 6'8"	Х	3						
1'3" x 6'8"	Х	3						
1'4" x 6'8"		3						
1'6" x 6'8"		3						
1'8" x 6'8"		3						
2'0" x 6'8"	$\checkmark$	6						
2'2" x 6'8"	$\checkmark$	6						
2'4" x 6'8"	$\checkmark$	6						
2'6" x 6'8"	$\checkmark$	6						
2'8" x 6'8"		6						
2'10" x 6'8"		6						
3'0" x 6'8"	$\checkmark$	6						

NOTE: Items designated with an X are cut from larger size skins. Items designated with a √ are available for order. NA for Not Available.






### Building Quality Doors Since 1866

# 6 PANEL MOLDED DOORS




## **Standard Dimensions**

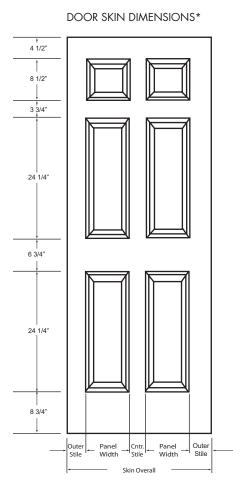

\*Measurements are approximate and before any required trim or adjustments for customer specifications

HOLLOW CORE CONSTRUCTION

SOLID CORE CONSTRUCTION

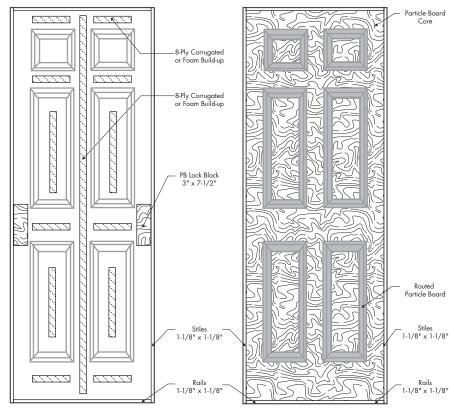

Smooth skin faces are paint grade only. All measurements are approximate. All door facings are nominal 1/8" thick. Type 2 glue bond standard.

Skin Size	Skin Overall	Panel Width	Center Stile	Outer Stile	Skin Size	Skin Overall	Panel Width	Center Stile	Outer Stile
1'0" x 6'8"	1'0-3/8"	7"	NA	2-11/16"	2'2" x 6'8"	2'2-3/8"	5-15/16"	3-3/4"	5-3/8"
1'2" x 6'8"	1'2-3/8"	7"	NA	3-11/16"	2'4" x 6'8"	2'4-3/8"	7-15/16"	3-3/4"	4-3/8"
1'3" x 6'8"	1'3-3/8"	7"	NA	4-3/16"	2'6" x 6'8"	2'6-3/8"	8-15/16	3-3/4"	4-3/8"
1'4" x 6'8"	1'4-3/8"	7"	NA	4-11/16"	2'8" x 6'8"	2'8-3/8"	9-15/16"	3-3/4"	4-3/8"
1'6" x 6'8"	1'6-3/8"	11-15/16"	NA	3-7/32"	2'10" x 6'8"	2'10-3/8"	9-15/16"	3-3/4"	5-3/8"
1'8" x 6'8"	1'8-3/8"	11-15/16"	NA	4-7/32"	3'0" x 6'8"	3'0-3/8"	11-15/16"	3-3/4"	4-3/8"
2'0" x 6'8"	2'0-3/8"	5-15/16"	3-3/4"	4-3/8"					

Note: A standard 2-1/8" bore diameter will require a minimum stile measurement of 3-11/16" to allow for a 2-3/8" backset. A standard 2-1/8" bore diameter will require a minimum stile measurement of 4-1/16" to allow for a 2-3/4" backset.