6 PANEL MOLDED DOORS

TEXTURED | **6'8" BEAD AND COVE**



Bead and Cove profile

HOLLOW CORE DOOR

- 1-3/8" and 1-3/4" hollow core
- Fingerjoint or Fiberwood stiles
- Wood rails available

SOLID CORE DOOR

- 1-3/8" and 1-3/4" solid core
- Gives solid feel with sound reduction
- All wood construction
- Available in particle board core

Sizes Available		
Dimensions	**Availability**	**Panels**
1'0" x 6'8"	X	3
1'2" x 6'8"	X	3
1'3" x 6'8"	X	3
1'4" x 6'8"	√	3
1'6" x 6'8"	√	3
1'8" x 6'8"	√	3
2'0" x 6'8"	√	6
2'2" x 6'8"	X	6
2'4" x 6'8"	√	6
2'6" x 6'8"	√	6
2'8" x 6'8"	√	6
2'10" x 6'8"	√	6
3'0" x 6'8"	√	6

NOTE: Items designated with an X are cut from larger size skins.
Items designated with a √ are available for order. NA for Not Available.

WMA WORLD MILLWORK ALLIANCE ™
Connections that Matter.

SHARP
Safety & Health Achievement Recognition Program
Consultation, An OSHA Cooperative Program

Building Quality Doors Since 1866

6 PANEL MOLDED DOORS

TEXTURED 6'8" B/C

Standard Dimensions

DOOR SKIN DIMENSIONS*

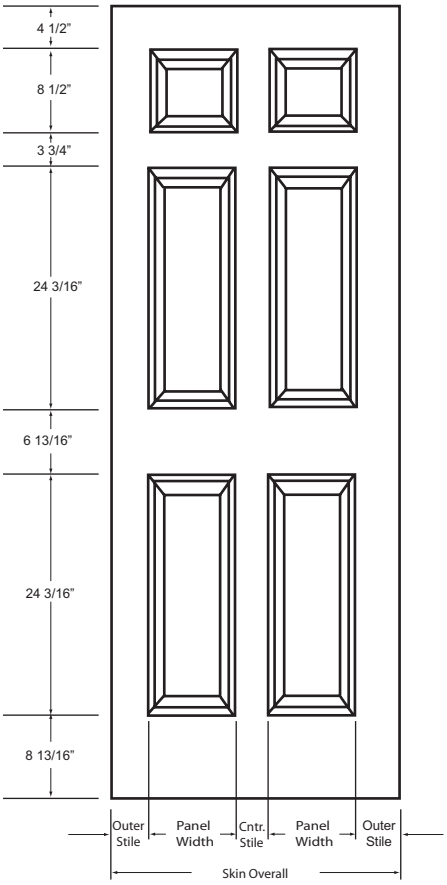

HOLLOW CORE CONSTRUCTION

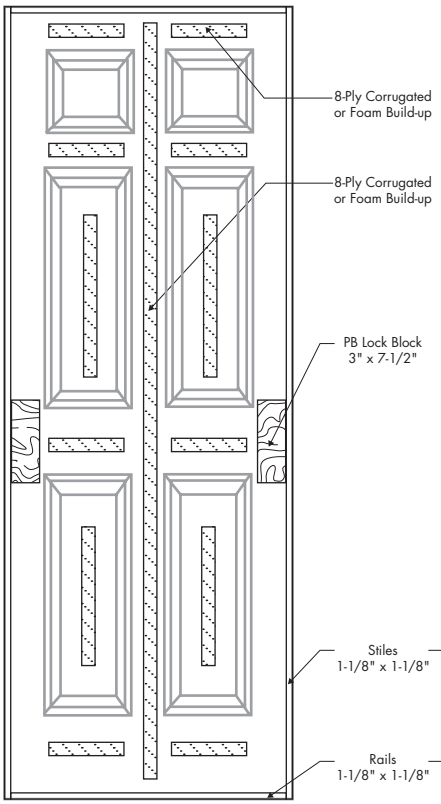

SOLID CORE CONSTRUCTION

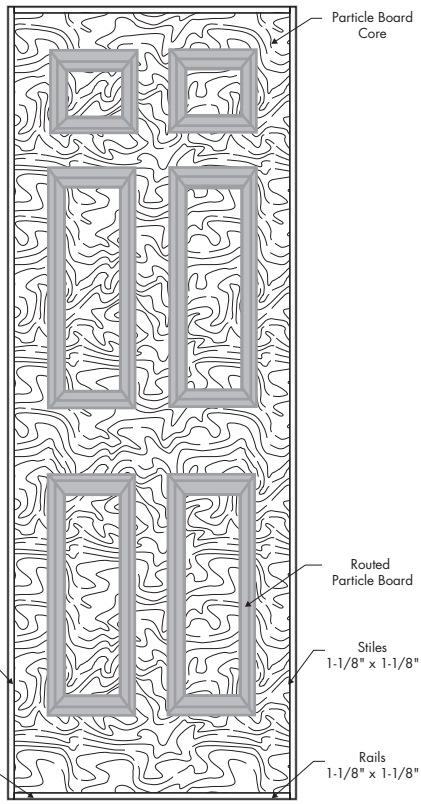

*Measurements are approximate and before any required trim or adjustments for customer specifications

Smooth skin faces are paint grade only.
All measurements are approximate.
All door facings are nominal 1/8" thick.
Type 2 glue bond standard.

Skin Size	Skin Overall	Panel Width	Center Stile	Outer Stile
1'0" x 6'8"	1'0-3/8"	7"	NA	2-11/16"
1'2" x 6'8"	1'2-3/8"	7"	NA	3-11/16"
1'3" x 6'8"	1'3-3/8"	7"	NA	4-3/16"
1'4" x 6'8"	1'4-3/8"	7"	NA	4-11/16"
1'6" x 6'8"	1'6-3/8"	11-15/16"	NA	3-7/32"
1'8" x 6'8"	1'8-3/8"	11-15/16"	NA	4-7/32"
2'0" x 6'8"	2'0-3/8"	5-15/16"	3-7/8"	4-5/16"

Skin Size	Skin Overall	Panel Width	Center Stile	Outer Stile
2'2" x 6'8"	2'2-3/8"	5-15/16"	3-7/8"	5-5/16"
2'4" x 6'8"	2'4-3/8"	7-15/16"	3-7/8"	4-5/16"
2'6" x 6'8"	2'6-3/8"	8-15/16"	3-7/8"	4-5/16"
2'8" x 6'8"	2'8-3/8"	9-15/16"	3-7/8"	4-5/16"
2'10" x 6'8"	2'10-3/8"	9-15/16"	3-7/8"	5-5/16"
3'0" x 6'8"	3'0-3/8"	11-15/16"	3-7/8"	4-5/16"

Note: A standard 2-1/8" bore diameter will require a minimum stile measurement of 3-11/16" to allow for a 2-3/8" backset. A standard 2-1/8" bore diameter will require a minimum stile measurement of 4-1/16" to allow for a 2-3/4" backset.

REV. 12-22-2023