


# 1 PANEL SHAKER MOLDED DOORS

SMOOTH    6'8" SQUARE - ADA DESIGN



## HOLLOW CORE DOOR

- 1-3/8" and 1-3/4" hollow core
- Fiberwood or Fingerjoint stiles and rails

## SOLID CORE DOOR

- 1-3/8" and 1-3/4" solid core
- Gives solid feel with sound reduction
- Fingerjoint stiles and rails

## Sizes Available

Dimensions	Availability	Panels
1'0" x 6'8"	NA	1
1'2" x 6'8"	NA	1
1'3" x 6'8"	NA	1
1'4" x 6'8"	NA	1
1'6" x 6'8"	NA	1
1'8" x 6'8"	NA	1
1'10" x 6'8"	NA	1
2'0" x 6'8"	NA	1
2'2" x 6'8"	NA	1
2'4" x 6'8"	NA	1
2'6" x 6'8"	NA	1
2'8" x 6'8"	NA	1
2'10" x 6'8"	X	1
3'0" x 6'8"	✓	1

NOTE: Items designated with an X are cut from larger size skins.

Items designated with a ✓ are available for order. NA for Not Available.


# 1 PANEL SHAKER MOLDED DOORS

SMOOTH 6'8" SQUARE - ADA DESIGN




## Standard Dimensions


### DOOR SKIN DIMENSIONS\*

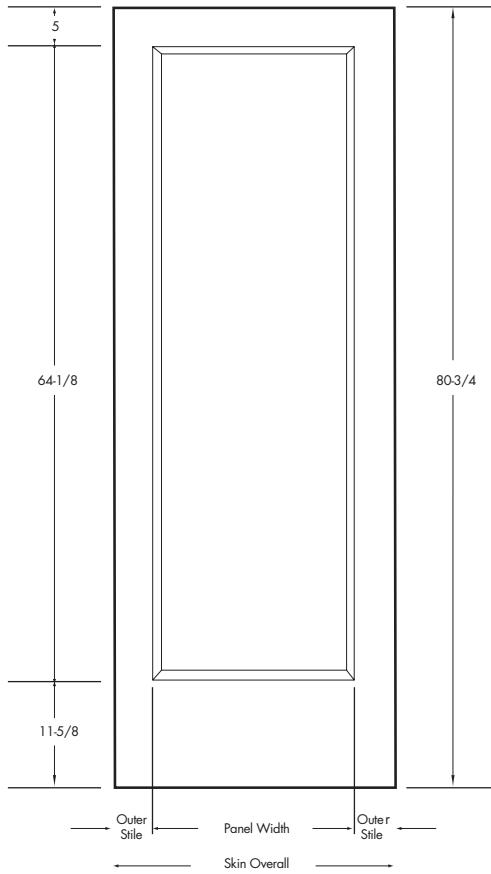

### HOLLOW CORE CONSTRUCTION

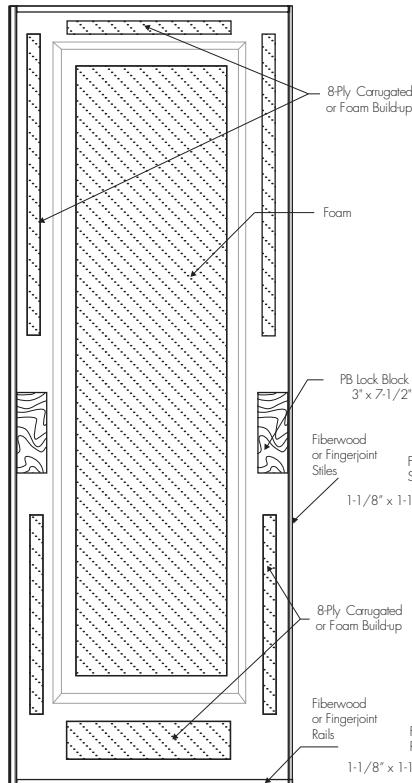

### SOLID CORE CONSTRUCTION

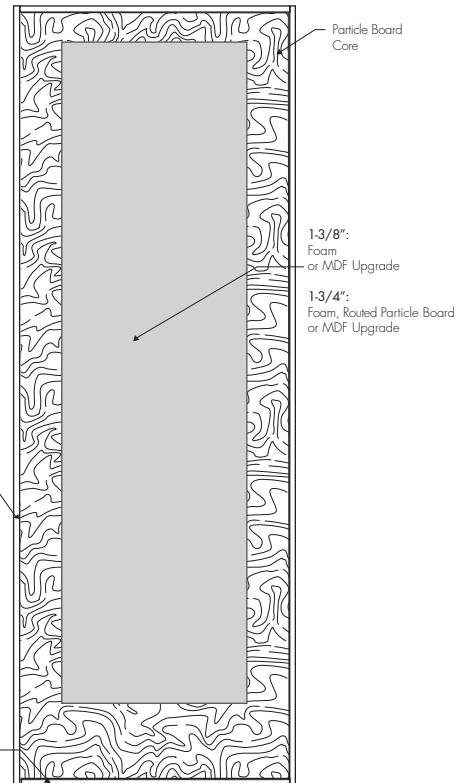

\*Measurements are approximate and before any required trim or adjustments for customer specifications

Smooth skin faces are paint grade only.  
All measurements are approximate.  
All door facings are nominal 1/8" thick.  
Type 2 glue bond standard.

Skin Size	Skin Overall	Panel Width	Center Stile	Outer Stile
2'10" x 6'8"	2'10-3/8"	2'0-1/2"	NA	4-15/16"
3'0" x 6'8"	3'0-3/8"	2'0-1/2"	NA	5-15/16"

Note: A standard 2-1/8" bore diameter will require a minimum stile measurement of 3-11/16" to allow for a 2-3/8" backset. A standard 2-1/8" bore diameter will require a minimum stile measurement of 4-1/16" to allow for a 2-3/4" backset.